


FCL5500 Wall mounting

Free Chlorine Controller / Transmitter with pH Compensation


At different pH values, Chlorine forms different species in water. For a reliable free chlorine measurement, it's necessary to take pH and temperature compensation into account.

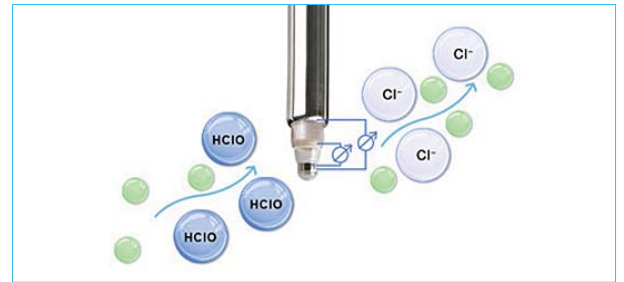

Free chlorine sensor works with hypochlorous acid

Specification

pH	Range	2.00~12.00pH
	Resolution	0.01pH
	Accuracy	±0.01pH
Free Chlorine	Range	0~2.000mg/L or 0~20.00mg/L
	pH compensation	2.00~9.00pH
	Resolution	0.001mg/L or 0.01mg/L
/ Hypochlorous Acid	Accuracy	1%±1LSD
	Temperature	
Temperature	Range	-10.0-110.0 °C
	Resolution	0.1 °C
	Accuracy	±0.3 °C
	Temperature Sensor	NTC22K / PT1000
	Temp. Compensation	Automatic -5.0 - +100 °C
Signal Output	Signal Output	4-20 mA (Adjustable)
	Current Accuracy	1% F.S.
	Load	< 500 Ω
Data interface	RS485	Yes
Relay Output	On/Off	2 SPST Relays
	Output	2.5A 230 VAC
	Cleaning/Alarm Relays	1X 2.5A
Others	Power	85~260 VAC or 24 VDC
	Working Temperature	0~60 °C
	Humidity	< 90%
	IP Rated	IP65
	Installation	Wall Mounting
	Dimensions	(H×W×D) 160×188×108 mm
	Weight	0.7 kg

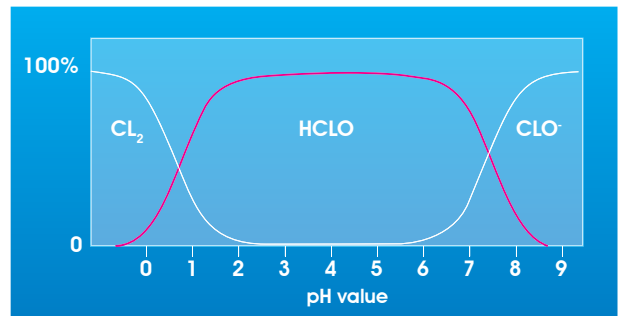

pH influence on the Free Chlorine measurement

CS5520 Free Chlorine Sensor

Process Free Chlorine Electrode with stainless steel body,
Range: 0 to 2.000 mg/L, 0 to 20.00 mg/L,
Work Temp: 0 - 50°C
Translation: 2µA/ppm,
Length: 120mm,
Dia: 13*120mm,
Translation: Cable: 3m, tinned open-ended.

